Menutree Website:

+ Products / docu / downloads
  + Accessories
    + Connector / Power supply
      + Connector 2pins small

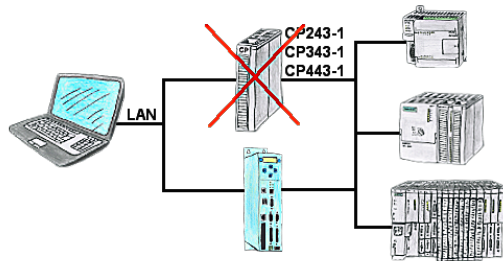**QR-Code Website:**

Please make sure to update your drivers before using our products.

Programming of S5-PLC's via LAN

You would like to respond to your S5-PLC via LAN, but not integrate an Ethernet-CP? No problem, plug the S5-LAN++ on the PD-interface and access via LAN.

Do you have a PLC without CP343-1 or CP443-1 and a TP-II as remote maintenance device? Then activate the CP-mode of the TP-II and your visualisation goes directly ONLINE via the LAN of the TP-II.
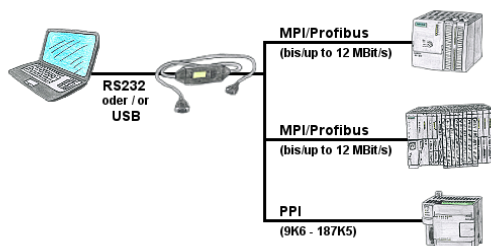
Wireless around the Schneider-PLC

Move wirelessly around the Schneider-PLC and communicate for example ONLINE in the status

S7-1200/1500 to S5

Coupling S7-controller with PN-port at S5-controller with PD-port via network

Programming S7-PLC/-modules via RS232/USB

PLC-programming/-communication from the PC "serial" or via "USB" from S7-200/300/400 or modules such as Sinamix, Sinumerik, MicroMaster, drives, converters. PPI up to 187.5 Kbit (PPI + PPI advanced), MPI/Profibus up to 12 Mbit. Compatible with the Siemens driver "PC-adapter", communication only with 64-bit operating-systems via USB and TIC-driver (limitation of serial communication from Siemens to 32-bit operating-systems).

S5-PLC triggered DB-backup/-restore without additional PC via PG-socket and Ethernet on FTP-server

Send of all kinds of SMS-messages controlled by the LOGO!-Control