

Menutree Website:


- + Products / docu / downloads
- + Hardware
 - + Programming devices
 - + Programming adapter S5
 - + S5 over RS232
 - + S5toMPI

QR-Code Website:



Please make sure to update your drivers before using our products.


Communication-driver for S7-PLC



S7-PLCs and you need data in your PC or production planning system?


The S7-communication-drivers connect the office-world with the control-world. Be it classic with a serial-port of the PC up to communication over the network. Thanks to additional adapters (such as S7-LAN), controllers without a LAN connection can be connected to the network. Nothing stands in the way of communication with an IP-address. On your PC for Windows as a DLL-file, for Linux as an object, you have tools where you can access the data of the controls by calling up functions such as "ReadBlock" or "WriteFlag". Tie for e.g. the DLL into your project and your application already has PLC-access or simply access the data with Excel and process it in Excel.

Integrated phone-book

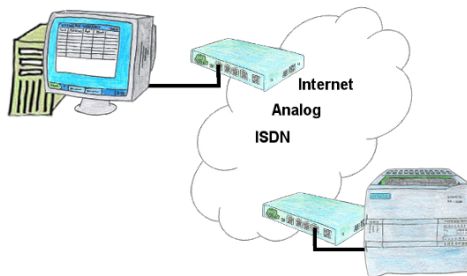

You have to consider several facilities and do not want to keep a watch list with phone numbers? No problem, the TELE-router contains a phone book, so you any time maintain the entire data connection in the router and build to the opposite side by clicking the link in the web browser.

Data acquisition/logging

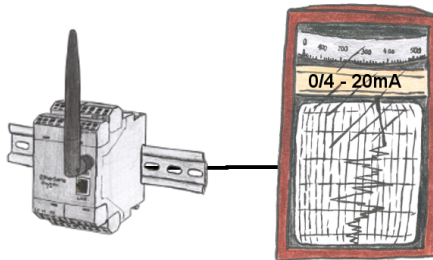

By connecting a line-recorder to the EtherSens-device anyone without network-knowledge can visually capture and further process the log.

Remote-maintenance Siemens-S5-PLC



Remote-maintenance of a Siemens-S5-controller with S5-LAN++ on PD-port via secure VPN-tunnel of the TeleRouter

To switch a MESSI-output via SMS



SMS-Versenden.
PASS=12345 DO1=1,16

```
PASS=12345 DO1=1,16
| | | | | 15 Sekunden Schaltzeit (0 bedeutet dauernd an)
| | | | | 1 = EIN, 2 = AUS (Bei AUS wird keine Schaltzeit beachtet)
| | | | | DO1 Schlüsselwort für Digitalausgang (DO1 bis DO8 möglich)
| | | | | Passwort aus dem Messpunkt Gerätezugang
| | | | | Schlüsselwort für Passwort
```

Switching an output via SMS is an integrated function of the MESSI. Herewith the switching operation will be secure and comprehensible from afar.

WIFI not allowed, what now?




You may not use WIFI in your environment?

Connect the USB-ETHERNET-adapter to the ProfiNet-WATCHDOG's USB-port and create another Ethernet-socket.

Connect your PC directly with LAN-cable to the ProfiNet WATCHDOG.

Data backup S7-PLC PN-port on USB-stick



S7-PLC triggered DB-backup/-restore without additional PC via PN-port to USB-stick