#### **Menutree Website:**

- + Products / docu / downloads
  - + Hardware
    - + Web-Visualization
      - + S7-VISU


## **QR-Code Website:**





Please make sure to update your drivers before using our products.

# Variable-chart without Step7-programming package

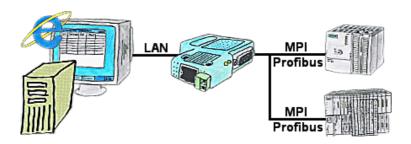

You would like to give your customer the opportunity to read current numbers of the manufacturing Online, without installing a visualisation or even the STEP7-package? Then a S7-LAN with the option Status Variable" is needed, and your customer can take a look at these password protected data on a site of the integrated webserver.

## 24V-supply from the PLC




You want to install your ALF directly in the switch-board and would like to use the 24V of the existing S7-PLC? No problem, connect the open ended side of the Kabelbrücke to the 24V port on your ALF and the bus-side on the MPI- or Profibus of this PLC. Even the ALF is supplied above this PLC.

## Data backup S5-PLC on USB-stick



S5-PLC triggered DB-backup/-restore without additional PC via PG-socket and Ethernet on USB-stick

## Watching of S7-PLC-devices via LAN without Ethernet-CP

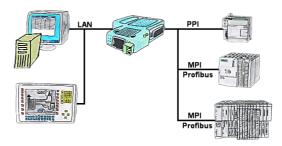


Your panel only has a LAN-socket as PLC-interface? No problem, connect this socket with the S7-LAN or the MPI-LAN-cable and plug it directly on the PPI/MPI/Profibus of the PLC. Then access to the variables and data of the PLC is already available.

## Data backup S7-PLC over MPI/Profibus on FTP-server




S7-PLC triggered DB-backup/-restore without additional PC via MPI/Profibus on FTP-server

#### WinTELEPROF-software = software-PG-TELE



Your're using the devices of the Tele-Network-family and don't want to have a device standing on the table? No problem. Install the WinTELEPROF-software on your PC and after link connection access to your Step5/7-programming software (also Siemens) via a virtual Com-Port.

At Step5 the Step5-software is going to be patched, then working with the virtual Com-Port will be also possible.



With the S5-H1-PG-LAN you would be able to use the H1-path-selection over the S5-LAN++ and communicate with all PLCs in the H1-bus. You dont have to connect serial to the CP, you can do this easy over your network.