

**Menutree Website:**


- + Products / docu / downloads
- + Hardware
  - + Programming devices
    - + S7
      - + WLAN/WIFI
      - + WLAN/WIFI-SETS
      - + ALF-UA-WLAN/WIFI-Sets

**QR-Code Website:**




Please make sure to update your drivers before using our products.

Easy handily oxygen display



You need the concentration of oxygen in your neighborhood? No problem, with the mobile HMG you can determine the concentration from 1 up to 100% with a exactness of 1% (dependent on your sensor).

## S5 to S5



Coupling S5-controller with PD-port at S5-controller with PD-port via network

## Universally on machine and PLC




Remote access to all your systems, PLCs without great effort. Even triggering of actions by setting the integrated digital-outputs or reading in the digital and analog-inputs is possible via the Internet connection.

Regardless of whether you use your PC with the CONNECT-software or have connected a device from the CONNECT-family. Couplings via LTE also enable access to the LAN-interface on the system side. No special SIM-card is required for this.

A solution with little effort and everything within your "private" cloud.


## Profinet-panel directly on S5-PLC



Replace defective panels in your "old" S5-systems with current and available S7-panels  
To do this, simply insert a placeholder PLC (e.g. 315-2-PN / DP) in the WinCC-project, the IP-address of the PLC corresponds to the IP-address of the S5-LAN++-module. You can then visualize the data as usual.


At the same time, the PLC can also be programmed/monitored via the network.

## DB-Backup/Restore S7-PLC PN-port on USB-stick via dig. IO




Via digital input triggered DB-backup/-restore without additional PC via PN-port to USB-stick

## S7-300/400 (MPI/DP) to S5



Coupling S7-controller with MPI/Profibus at S5-control with PD-port via network

## Fuzzy controller with the OSC-II

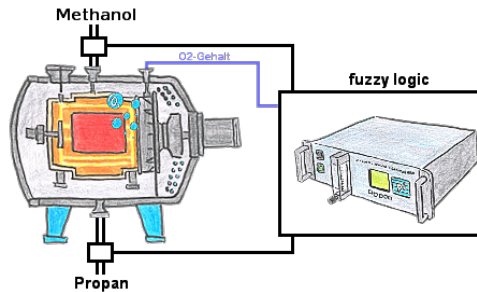

Through 3 free configurable limits (of each kind) you wont be able to realice a fuzzy-controller of your heat treatment furnace.