

Menutree Website:


- + Products / docu / downloads
- + Accessories
 - + Telefon-cables / -equipment
 - + Telephone cable Germany/USA

QR-Code Website:




Please make sure to update your drivers before using our products.

Data backup S7-PLC over MPI/Profibus on USB-stick

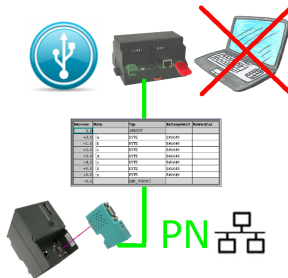


S7-PLC triggered DB-backup/-restore without additional PC via MPI/Profibus on USB-stick

Link S7-TCP-IP Panel to MPI Profibus over WiFi

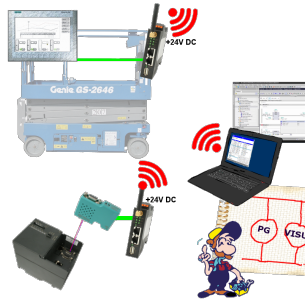

Use the latest S7-TCP-IP panels for your MPI / Profibus.
Thanks to WLAN also usable for mobile platforms or cranes.
Connect several nodes at the same time via a network module.
Simultaneous access from different systems possible.

Actual data of S5/S7-PLC in Excel-file

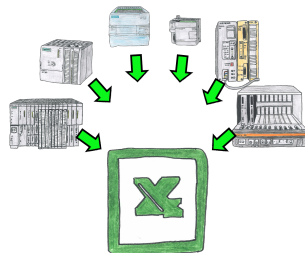

Vorlage + aktuelle SPS-Daten => Excel-Datei
Template + actual PLC-data => Excel-file


Logging of workflows, recording of operating states, archiving of process data, all of these requirements can be handled with "PLC data in Excel".

You create a template-file in Excel, enter special keywords as placeholders for PLC-data such as flags, timers, counters, I/O and the connection-parameters and save the file as a template for the tool. The tool runs on a Windows compatible PC and polls the defined controller. As soon as the trigger event occurs, the configured PLC-data is read out and entered in the template file instead of the placeholder and saved under a specified file-name in the specified directory.

It is also possible to communicate with controllers without a network-interface via S7-LAN (with S7-200/300/400) or S5-LAN++ (with S5-90U to 155U).

A corresponding Excel-file for each trigger event.

Atomic time at the PLC

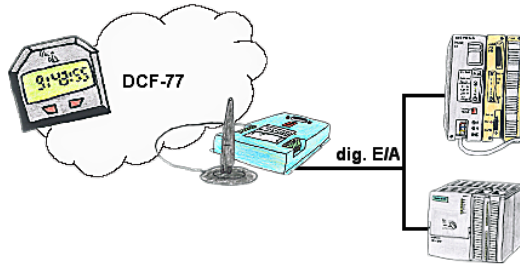

For your production flow you're always in need of an exact time? No problem, connect the SPS-Clock with 4 digital in-/outputs of your PLC, after synchronisation of the SPS-Clock the updating time can be read in a DB of the PLC.


Operation/control via integrated web-server



Observe the collected energy-information (voltages, power, currents, phase-angles, ...) on the integrated web-server of _MONI_ "cable-less" with your mobile-phone or tablet. Change the parameterization of _MONI_, operate and control _MONI_ easily via the web interface.

Of course you can also operate wired, where you put _MONI_ in your network. Parallel operation of LAN and Wifi is also possible.

Message via SMS (SMSC)



1. Senden einer SMS
2. Weiterleiten auf Handy
3. Aktiver "Weckruf" und Aufforderung zur Quittierung
4. Quittierung

A SMS to a mobile phone is basically send by SMSC. Within the GSM-network it takes place via on-net SMSC. Thereby it's unimportant in which mobile network the receiver is.

The message is activated by:

- digital contacts (relays, motion detector...)
- serial interface (PLC, PC, Microcontroller ...) bitserial (PLC)

The detection system transmits the SMS to the mobile network operator. The mobile network operator provides the SMS to the mobile phone. Optionally the detection system dials the mobile phone to wake up" the receiver or to initiate the confirmation handling.

Wireless around the Schneider-PLC



Move wirelessly around the Schneider-PLC and communicate for example ONLINE in the status